

FOR BUILDERS

Building with XBeton

AAC blocks and reinforced panels: a practical introduction for builders

AAC architecture reference: third-party photo, not an XBeton project

The planning questions that shape the job

Resolve scope and ownership before comparing installation effort or pricing.

Product and assembly	Site execution	Installed quote
Which product and assembly fit the application?	What changes for the crew and equipment plan?	What belongs in the installed quote?
Design team	**Builder and installer**	**XBeton and estimator**

Architectural inspiration: build hero house. Not an XBeton project.

The XBeton product system




AAC BLOCKS

Blocks and special masonry shapes

BOND & SHIELD

Bond & Shield does not replace detailing.

Illustration: generic AAC blocks, not a product photo.

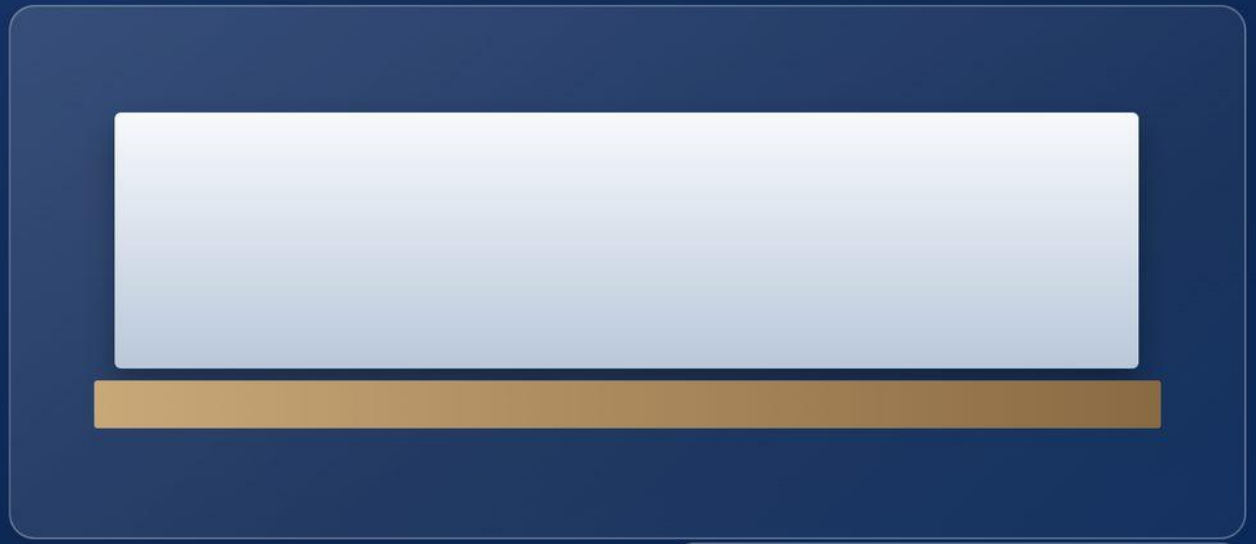

REINFORCED PANELS

Reinforced wall, floor and roof panels



Illustration: generic coating layer, not a product photo.

Blocks and panels change different tasks

Task	Blocks	Reinforced panels
Layout	Masonry layouts and local fitting.	Application-specific panel layout.
Handling	Plan unit handling and staging.	Plan lifting, access and equipment.
Openings and services	Coordinate openings and MEP early.	Coordinate openings and MEP before fabrication.
Design documents	Confirm assembly details.	Shop drawings coordinated with the engineer of record.



Illustration: generic reinforced panel, not a product photo.

REINFORCED PANELS

Do not assume every panel can be field cut. Coordinate connections as well as openings and services.

INSTALLATION PLANNING

Installation planning

Planning overview, not an installation instruction.

Illustrative navy layout. No product photograph.

01 A prepared base and first course

02 Approved mortar, reinforcement and connections

03 Coordinated service routes and compatible finishes

04 Inspection and quality checks


Efficiency needs a project baseline

30-40%

Supplier reports 30-40% less labor time. Handling and sequencing can change the result.

Two claim-range endpoints only. Source: xbeton.com website claim. Actual labor depends on scope, crew, logistics and assembly.

Illustrative index from supplier claim, not project results

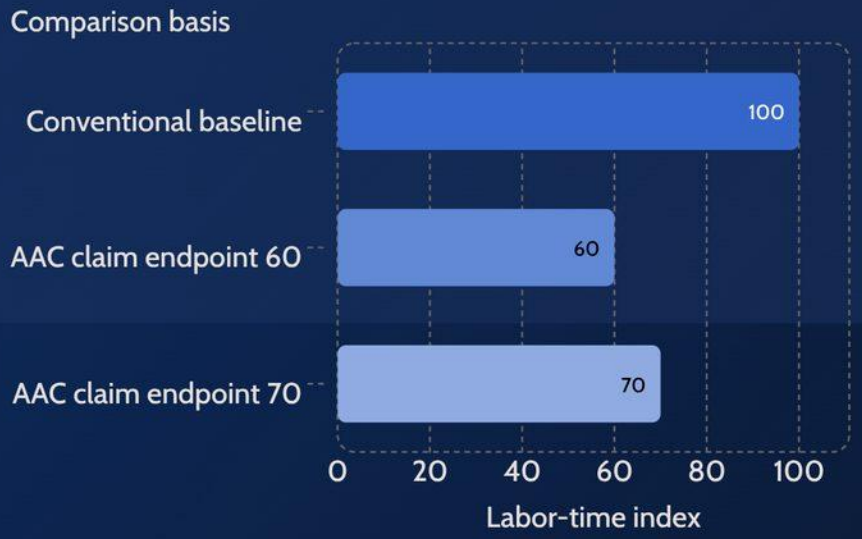

Compare crew hours for the same wall scope.

The installed-cost scope

Unpriced by intent. Confirm the whole scope before comparing quotes.

Scope item	What to confirm	Responsible party
Material quantities, freight and unloading	Takeoff, shipment scope and unloading provision.	XBeton and builder
Labor, equipment and crew learning	Crew assumptions, lifting needs and familiarization.	Builder and installer
Connections, MEP coordination and finishes	Included details, interfaces and compatible materials.	Design team and trades
Waste, exclusions and schedule assumptions	Allowances, omitted work and sequencing basis.	Estimator and builder

Architectural inspiration: build hero house. Not an XBeton project.

BUILDER CHECKLIST

Fire performance starts with the tested assembly

01

Request the test report

Ask XBeton for the applicable fire-test and assembly report.

02

Match the build-up

Match wall or roof build-up, thickness, joints, openings, support and finishes to the tested product.

03

Confirm for this project

Have the design professional and local authority confirm suitability for this project.

Supplier marketing references a 6-hour rating [NEEDS VERIFY]. The assembly test report has not been reviewed.

BUILDER CHECKLIST

What to bring to a project review

A clear scope lets the team discuss the right product, details and installed quote.

01

Plans and application

Site plan, wall, floor and roof use, and approximate area.

02

Location and schedule

ZIP code, delivery access and target dates.

03

Design and performance needs

Structural role, openings, fire, acoustic and thermal targets, and missing reports.

04

Installation and quote scope

Crew, equipment, finishes, freight and exclusions.

Bring these inputs to the XBeton project conversation on the next card.

Architectural inspiration: AAC architecture reference, third-party photo. Not an XBeton project.

Request a project review

Choose the destination that matches your next planning task.

Products

https://www.xbeton.com/

Project planning

https://build.xbeton.com/

Request a review

www.xbeton.com/contactus

Ask the builder to bring a real application and project location. Use https://build.xbeton.com/builders#project to begin.